


front view

LSJ-27-GR TECHNICAL CHARACTERISTICS	
PAYLOAD	270 daN
NET WEIGHT	220 Kg
RATED CAPACITY	380 daN
SPEED	7 mt/min
TYPE OF SPEED	FIXED VARIABLE (OPTIONAL)
MAX TRAVEL	UP TO 12 meters
ROPES	4
ROPE DIAMETER	4 mm
ROPE TYPE	RIGHT REGULAR LAY GALVANIZED MBL 10,5 KN
LOAD POLE	Ø48,3-50 mm - L 5000-12000 mm
POSITIONING ERROR	± 0,05 %
EXAMPLE FOR OUTLETS	16 A CEE / 32 A CEE 16 A SHUKO / DMX
MOTOR POWER	0,75 KW
BRAKE TYPE	DOUBLE ELECTROMAGNETIC MOUNTED ON MOTOR
REDUCER GEARBOX	COAXIAL
LIMIT SWITCH	ROTARY 4 SWITCHES
ENCODER	ABSOLUTE/RELATIVE (OPTIONAL) ON OUTPUT SHAFT
LOAD CELL	OPTIONAL
AUXILIARY SAFETIES	CABLE-BREAK ON BOARD SLACK CABLE DETECTORS ON EACH SUPPORTING CABLES(OPTIONAL)
IN ACCORDANCE TO THE EUROPEAN MACHINERY DIRECTIVE, TO DIN 56950 BGV D8+ REGULATIONS AND WITH CE MARKING .	

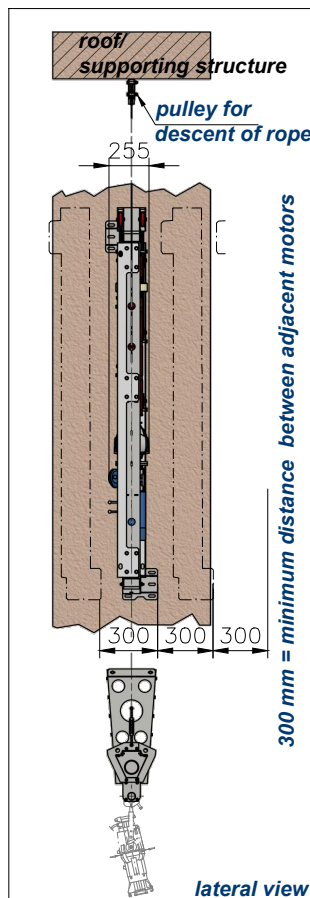

lateral view

LSJ-37-GR TECHNICAL CHARACTERISTICS	
PAYLOAD	370 daN
NET WEIGHT	260 Kg
RATED CAPACITY	480 daN
SPEED	8 mt/min
TYPE OF SPEED	FIXED VARIABLE (OPTIONAL)
MAX TRAVEL	UP TO 15 meters
ROPES	4
ROPE DIAMETER	5 mm
ROPE TYPE	RIGHT REGULAR LAY GALVANIZED MBL 17,7 KN
LOAD POLE	Ø48,3-50 mm - L 5000-12000 mm
POSITIONING ERROR	± 0,05 %
EXAMPLE FOR OUTLETS	16 A CEE / 32 A CEE 16 A SHUKO / DMX
MOTOR POWER	1,1 KW
BRAKE TYPE	DOUBLE ELECTROMAGNETIC MOUNTED ON MOTOR
REDUCER GEARBOX	COAXIAL
LIMIT SWITCH	ROTARY 4 SWITCHES
ENCODER	ABSOLUTE/RELATIVE (OPTIONAL) ON OUTPUT SHAFT
LOAD CELL	OPTIONAL
AUXILIARY SAFETIES	CABLE-BREAK ON BOARD SLACK CABLE DETECTORS ON EACH SUPPORTING CABLES(OPTIONAL)
IN ACCORDANCE TO THE EUROPEAN MACHINERY DIRECTIVE, TO DIN 56950 BGV D8+ REGULATIONS AND WITH CE MARKING .	

**DECIMA**  
1948

DESCR. - GATHERED ROPES HOISTS - LSJ SERIES

DATE	2018/03/26	WEIGHT	220 Kg - 260 Kg
DRAWER	M.Z.	QTY	-
VERIF.	M.Z.	SHEET	A4
REV.	3	CODE	LSJ-27-37-GR